

Schwing Line Pumps

LP 350 / SPL 1000 / SPL 1200 / SPL 1400 / SPL 1800



LP 350 / SPL 1000 / SPL 1400 / SPL 1800

The SCHWING Line Pump is a compact truck mounted concrete pump for applications where concrete should be pumped through static pipe lines. Designed for long horizontal and vertical pumping distances, this efficient pump unit meets the demands of a thoroughly rewarding niche market, i.e. in applications where the deployment time has been too short and the set up time too long for stationary concrete pumps or where standard truck mounted concrete pumps with placing booms are too large or too small.

Mobility is the crucial factor here, and is the one making this machine a valuable addition to any concrete pump fleet owned by a pump service enterprise. But more than that, it's favourable size makes the SCHWING Line Pump the ideal business launching model. The entrepreneur who has to think in economic terms when ordering his 'very first', but not at the expense of operation dependability and SCHWING quality, will find decision making simplified with the line pumps modular system. Just the basic pump unit mounted on a reasonably priced, medium sized carrier vehicle and driven by its engine provides a complete all round machine which soon gives value for money and yields a profit. The concrete pump can be retrofitted and expanded at any time to meet individual requirements.

A wide range of equipment and accessories are available for this purpose, i.e. :-


The Separate Engine

This makes the concrete pump independent of a motorized carrier vehicle and offers full capacity utilization even with second hand chassis.

The Valve Options

You choose between 1. Rock valve and 2. Flat gate valve system.

Line Pump - Special Features

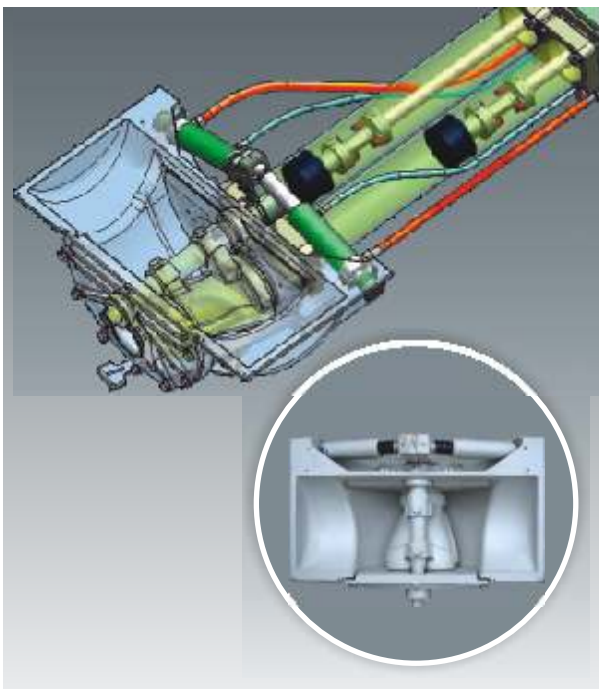

Flat Gate Valve

The two flat gate valves working independently have been especially developed for pumping concrete. Their working system with automatic adjustment permits trouble-free pumping even with badly worn parts.



Integrated Control Block

The hydraulic control system is integrated with in the drive. The compact control block & minimal hydraulic lines makes the equipment Reliable & durable.



R.L Rock Valve

RL-Rock valve, engineered by SCHWING R&D after extensive studies of behavior of tough concrete in various developing countries. This rugged, reliable rock valve is highly suited for stiff, difficult mixes of concrete and ideal for use in combination with the long stroke pumping unit. An option that can be recommended is the hard facing layer for extremely long service life.

Fast Switching Valve

Compact design individual switching circuit ensures quick operation of rock valve.





Maintenance

A central bank of grease nipples supplies grease to all of the lube points on agitator and rock valve.



Remote control

The Concrete pump comes complete with a 10 meter cable remote control as a standard feature.



Optional Pipe Rack

We recommend the selection of optional pipe rack. Using this setup you can carry 100 meters of pipeline in the truck itself safely without damage.



Hydraulics

Direct high torque driven on to the agitator shaft as well as robust design of all hydraulic components in conjunction with constant flow micro filtering of the hydraulic oil ensure operational reliability and a long service life.



High Pressure Water Pump

We also provide high pressure water pump for cleaning concrete pump and other accessories which will enhance the life time of the components.

Line Pumps - Technical Data

Description	Units	LP 350 D	LP 1000	LP 1200	LP 1400	LP 1800
Motor/ Engine rating	kW	49	35	48.6	D49	81
Pumping cylinder	mm	180 / 1200	180 x 1000	180 x 1200	180 * 1400	200 * 1600
Max strokes / min		25	24	24	24	24
Max theor.concrete output	cu.m	46	36	45	52	73
Max concrete pressure	bar	60	65	70	99	112
Max delivery line	mm	150	150	150	150	150
Feeding hopper capacity	liter	600	400	400	400	400/600

